

“SlideSmart DC is super easy to install and program. The soft-start and soft-stop is awesome.”

Randy Saylor
Foster Fence, Texas

SlideSmart ™

Ultra Reliability • Easy Installation • Smart Power

Smooth gate travel provided by sophisticated soft-start and soft-stop technology. No more jerky motions or noisy, slamming gates.

Continuous battery backup provides uninterrupted operation and reliable security even during an unexpected power outage.

Fewer parts means fewer problems. Simple operator design uses only high quality, robust parts.

Quick installation, low maintenance, and reliable operation make SlideSmart DC the *smart* automated gate solution for residential and commercial security.



 **HySecurity**
Simple. Reliable. Secure.®

RESIDENTIAL COMMERCIAL RESIDENTIAL COMMERCIAL



Ultra Reliable High Security

Distributed by:

The Ultimate in Intelligent, Programmable Security

“SlideSmart is outstanding! The smooth gate motion is great and minimizes wear on expensive gate hardware.”

David Stone
Access Systems Integrators, Indiana

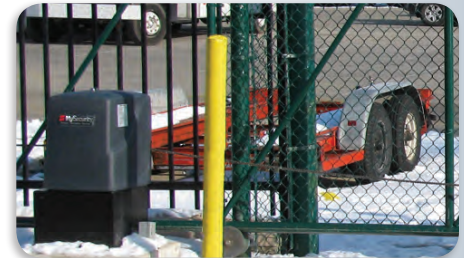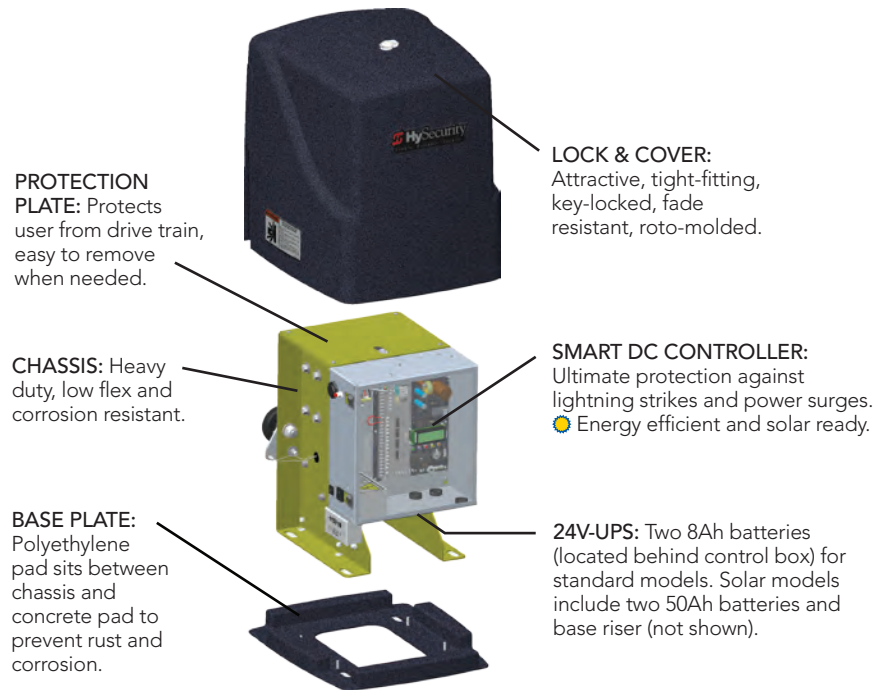

SlideSmart DC™ Models

Model	SlideSmart DC 15	☀️ Solar SlideSmart DCS 15	SlideSmart DC 10F	☀️ Solar SlideSmart DCS 10F
Max Gate Weight	1,500 lb (682 kg)	1,500 lb (682 kg)	1,000 lb (455 kg)	1,000 lb (455 kg)
Max Gate Length	40 ft (12 m)	40 ft (12 m)	40 ft (12 m)	40 ft (12 m)
Rate of Travel	0.75 to 1.25 ft/s (23 to 38 cm/s) Open/Close speed set separately	0.75 to 1.25 ft/s (23 to 38 cm/s) Open/Close speed set separately	1.75 to 2.25 ft/s (53 to 69 cm/s) Open/Close speed set separately	1.75 to 2.25 ft/s (53 to 69 cm/s) Open/Close speed set separately
Duty Cycle	Continuous	Continuous	Continuous	Continuous
Temp. Rating	-13°F to 158°F (-25°C to 70°C)	-13°F to 158°F (-25°C to 70°C)	-13°F to 158°F (-25°C to 70°C)	-13°F to 158°F (-25°C to 70°C)
Voltage Input	115V or 230V, 50/60 Hz	24V solar panels	115V or 230V, 50/60 Hz	24V solar panels
Accessory Power	12VDC and 24VDC and 24VAC 1 A each	12VDC and 24VDC 1 A each	12VDC and 24VDC and 24VAC 1 A each	12VDC and 24VDC 1 A each
Communication	USB, RS-232, RS-485, Ethernet option	USB, RS-232, RS-485, Ethernet option	USB, RS-232, RS-485, Ethernet option	USB, RS-232, RS-485, Ethernet option
UL 325 Listing	Usage Class I, II, III, IV*	Usage Class I, II, III, IV*	Usage Class III, IV**	Usage Class III, IV**
Warranty	5 year (7 year single-family residential)	5 year (7 year single-family residential)	5 year	5 year

*Speed setting cannot exceed 1 ft/s for Class I and II usage. **Not for residential use or applications intended to serve the general public.
Note: Number of battery backup cycles after power loss is determined by gate size, duty cycle, peripherals, and other site conditions.

OPTIONAL ACCESSORIES: HY-5A intelligent vehicle detectors, extended battery backup, solar ready, photo eyes. Compatible with all available access control, safety, vehicle detection and many other accessories.

SYSTEM SUPPORT: Contact HySecurity® for CAD drawings, installation information, tech manuals, help with specialty site requirements or other support. Visit www.hysecurity.com or call to speak with a HySecurity representative today.



phone 1-800-321-9947 fax 1-888-321-9946

www.hysecurity.com • info@hysecurity.com

6623 South 228th, Kent, Washington 98032-1876

HySecurity operators, accessories and parts are stocked by distributors and installers across North America